

UniMatch® Classical Multi-Plus® A, B, C, D, E

Multi-Plus V-Belts are designed to perform in tandem in multiple V-Belt drives, maintaining drive efficiency and belt performance. Multi-Plus V-Belts are always matched, easy to install and maintain. Multi-Plus V-Belts come in a complete range of sizes, are anti-static and offer oil and heat resistance meeting ARPM requirements.



Dual Branding – A and B section belts up to 100" are Dual Branded clearly identifying both ARPM classical and fractional horsepower (FHP) sizes allowing consolidation of your classical and FHP inventory into one belt line – saving you money! No need to carry two separate product lines. The dual part number system is more than just labeling, too. FHP & Classical belts have the same top width dimension but classical profile is deeper, allowing more belt/pulley contact and reducing sheave wear.

Dual Branding Examples: A40 (4L420) --- B78 (5L810)




WARNING: This product can expose you to chemicals including carbon black, which is known to the State of California to cause cancer or birth defects or other reproductive harm. For more information visit www.P65WARNINGS.ca.gov

PART NOMENCLATURE

A15

A = 0.50" width x 0.31" thickness

15 = Inside length 15.0"

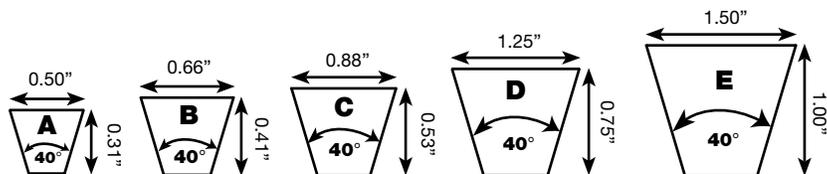

Features & Benefits

UniMatch Construction: Consistent performance in multiple V-Belt drives - ensures all belts will measure within ARPM matching standards

Dual Branding: A & B sections dual-branded with classical and FHP part numbers - reduces inventory by allowing you to discontinue 4L and 5L

Oil & Heat Resistant: Durability in tough environments

Construction

Compound: Natural rubber/SBR
Cord: Polyester
Cover: Cotton/polyester blend

Technical Info

Applications General Industry, HVAC Equipment, Lawn & Garden, Agriculture
Engineering Standards Conforms to ARPM standard IP-20
Temperature Range -22°F/+176° (-30°C/+80°C)
Recommended Pulleys Use pulleys made to ARPM standards

All items subject to minimum order requirements.

